



CONNECTION METHOD 1

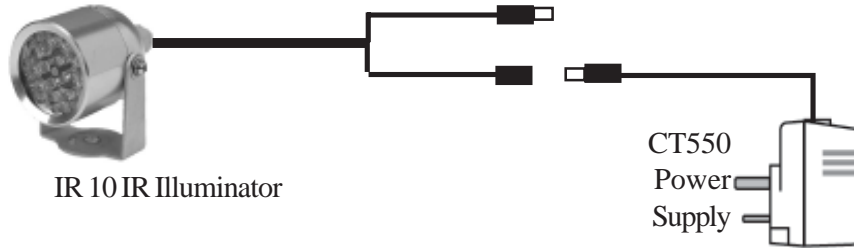

CONNECTION METHOD 2

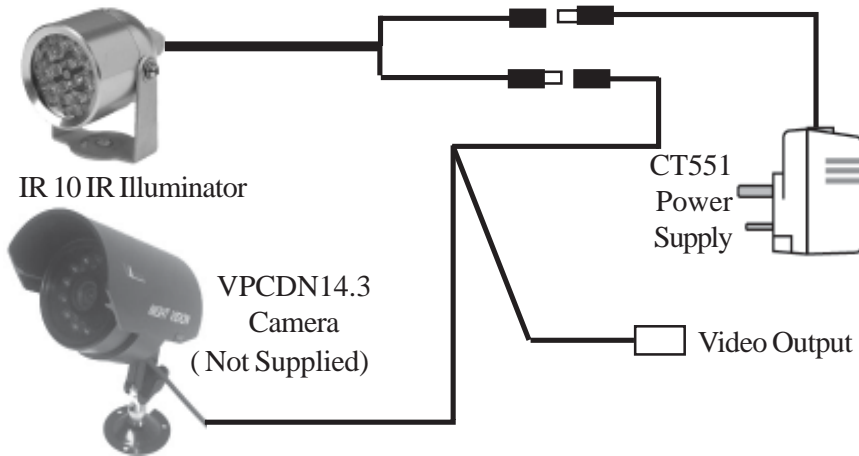

SPECIFICATIONS

Operating Voltage	11- 13V dc
Current Consumption	200 mA Max
Distance	10 Metre (Distance based on camera LUX level & IR reflection)
H.V. Angle	70°
IR LED	28 Unit
Wave	850nm
Operating Temperature	-10°C to +40°C
Weatherproofing	IP68



Churchill Way, Lomeshaye Ind. Est., Nelson, Lancashire, BB9 6RT, England
Tel: (01282) 695 500 Fax: (01282) 695 511 Helpline 09066 191 133*
Email sales@voltek.co.uk Website www.voltek.co.uk

*Helpline call cost 60p/minute. Open 9am to 5pm, Mon to Fri.
Voltek reserves the right to change any product or specification without notice
(c) 2003 Voltek Automation Ltd. Issue 1

INSTALLATION



IR10 10 Metre IR Illuminator

Thank you for purchasing the IR10 10 Metre IR Illuminator. Please study these instructions carefully before attempting to operate the unit.

The IR10 is an Infrared Illuminator that will connect to a 12VDC Power Supply or Camera that has a 12VDC 2.1mm centre positive power source.

PRODUCT FEATURES

- An Effective way of discreetly illuminating an area where monochrome cameras are operating in the dark.
- Plug-&-go connections for a fast and simple installation.
- Full pan and tilt adjustment so that you can aim the IR at your desired area.
- IR only operates at night using self contained day light sensor.

INSTRUCTIONS